


Sysracks SRE-Series It Enclosure PART LIST

#	DESCRIPTION	PICTURE	APPLICATION	QUANTITY - Pcs
1	M5 - Self Tapping Screws – Black		1.Vertical U-Mark Rails (4 pcs) 2.Top/Bottom (4 pcs) 3.Side Frames to Back Panel / Front Door Frame to Side Frames (8 pcs)	20
2	M6 – Screws (Hexagonal type)		Side Frames to Back Panel / Front Door Frame to Side Frames (8 pcs)	8
3	M6 Cage Type Nuts/Screws		Mounting user equipment (shelf) on the vertical U-rails	8
4	Rubber Dampers		Side panels / Front Door	14
5	Latch Handle Door Lock		Front Door	1
6	Door Lock Keys		Front Door Locking Mechanism	2

STEP#1

Pull the spring latches and remove the front door from the front frame



STEP#2

Unlock and remove carefully the side panels from the side frames



Silver hexagon **M6** screw




M5 black screw

Install the Front/Rear vertical U-mark rails at a desired distance apart on both side frames using Screws **M5**


STEP#3

Using **M6** (silver) hexagonal screws, attach 2 side frames to the back panel. Secure the carcass with the **M5** black screws

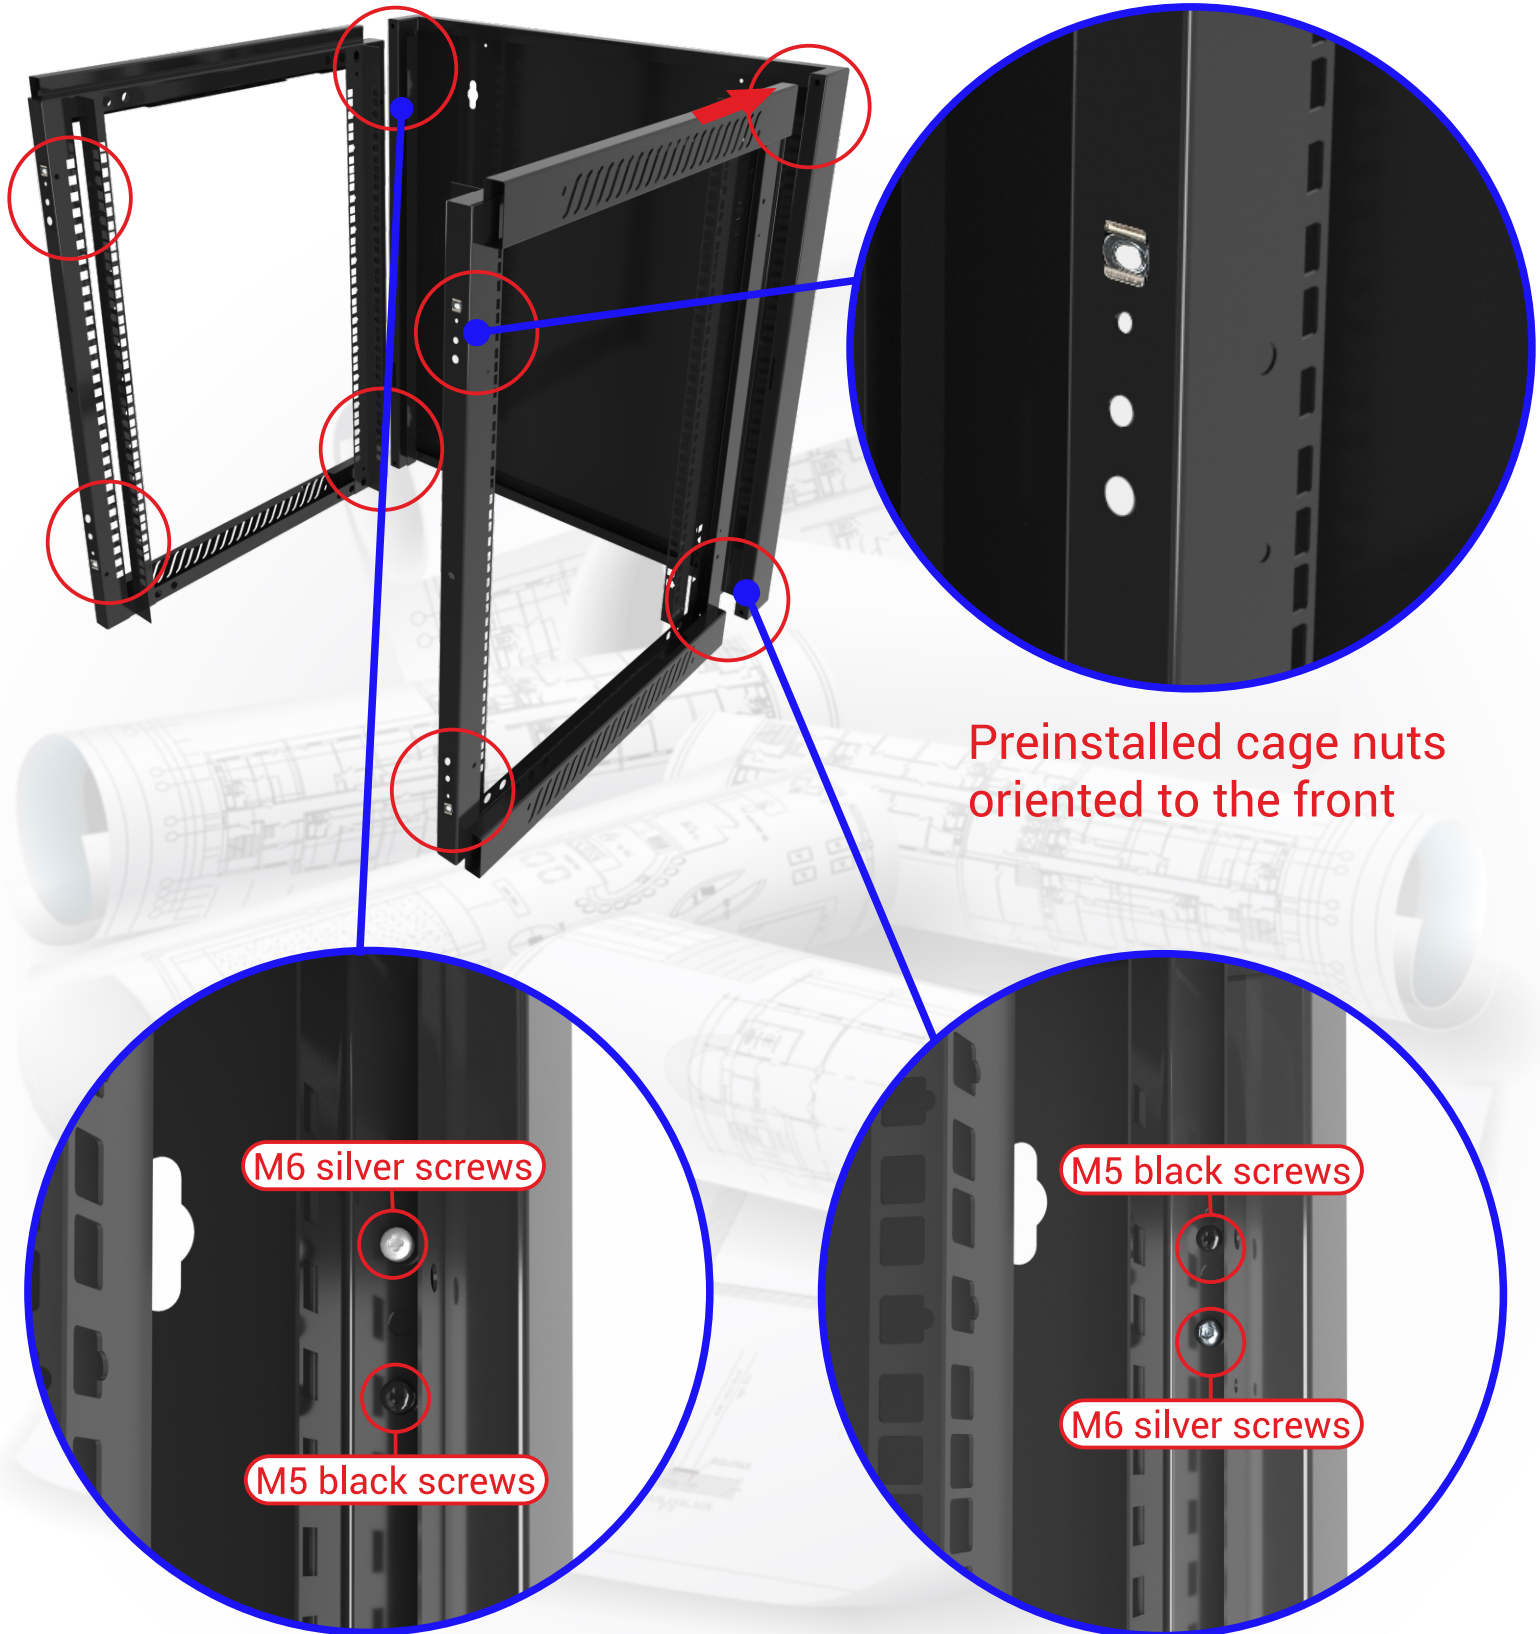

STEP#4

Slide the Top into the Back Panel slots.

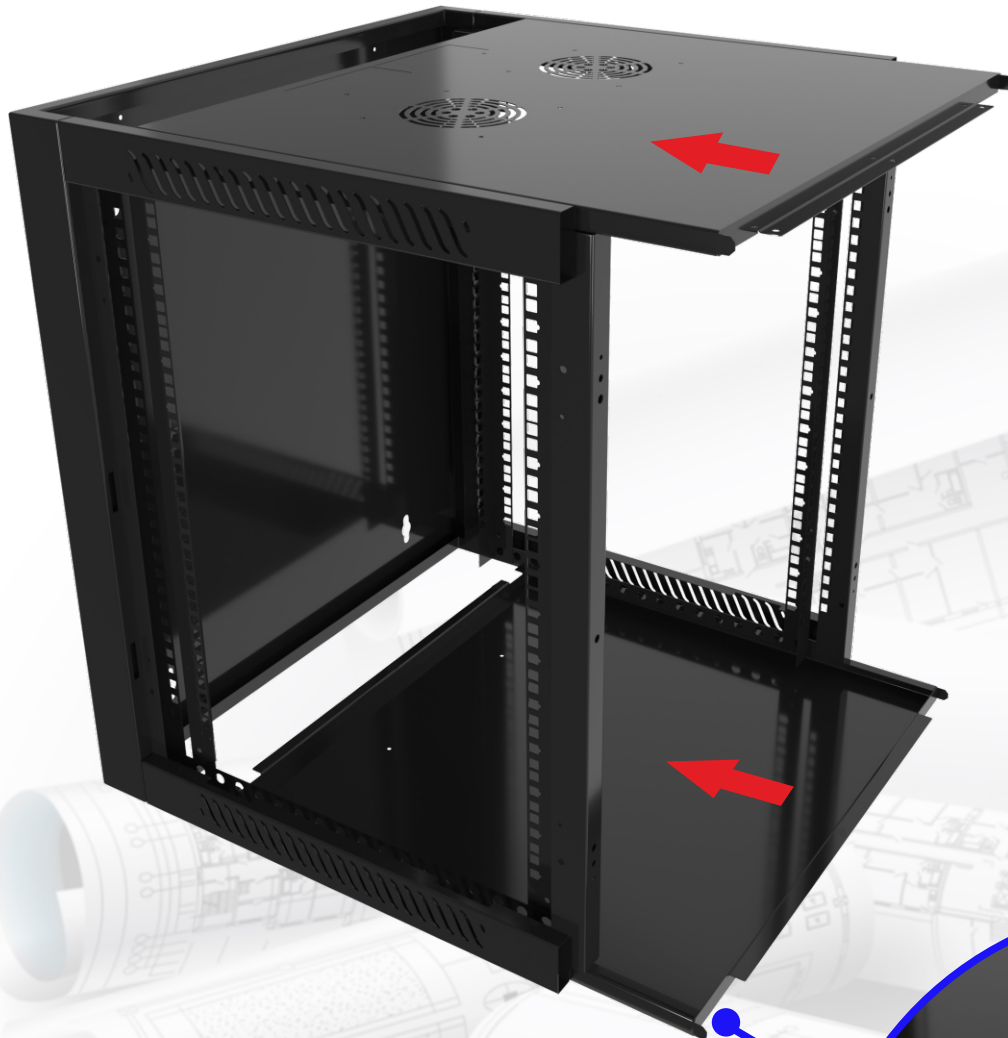


Do same with the Bottom



STEP#5

Secure the Top with the side Frames from the inside using the Black **M5** Screws as shown in the Photo below.

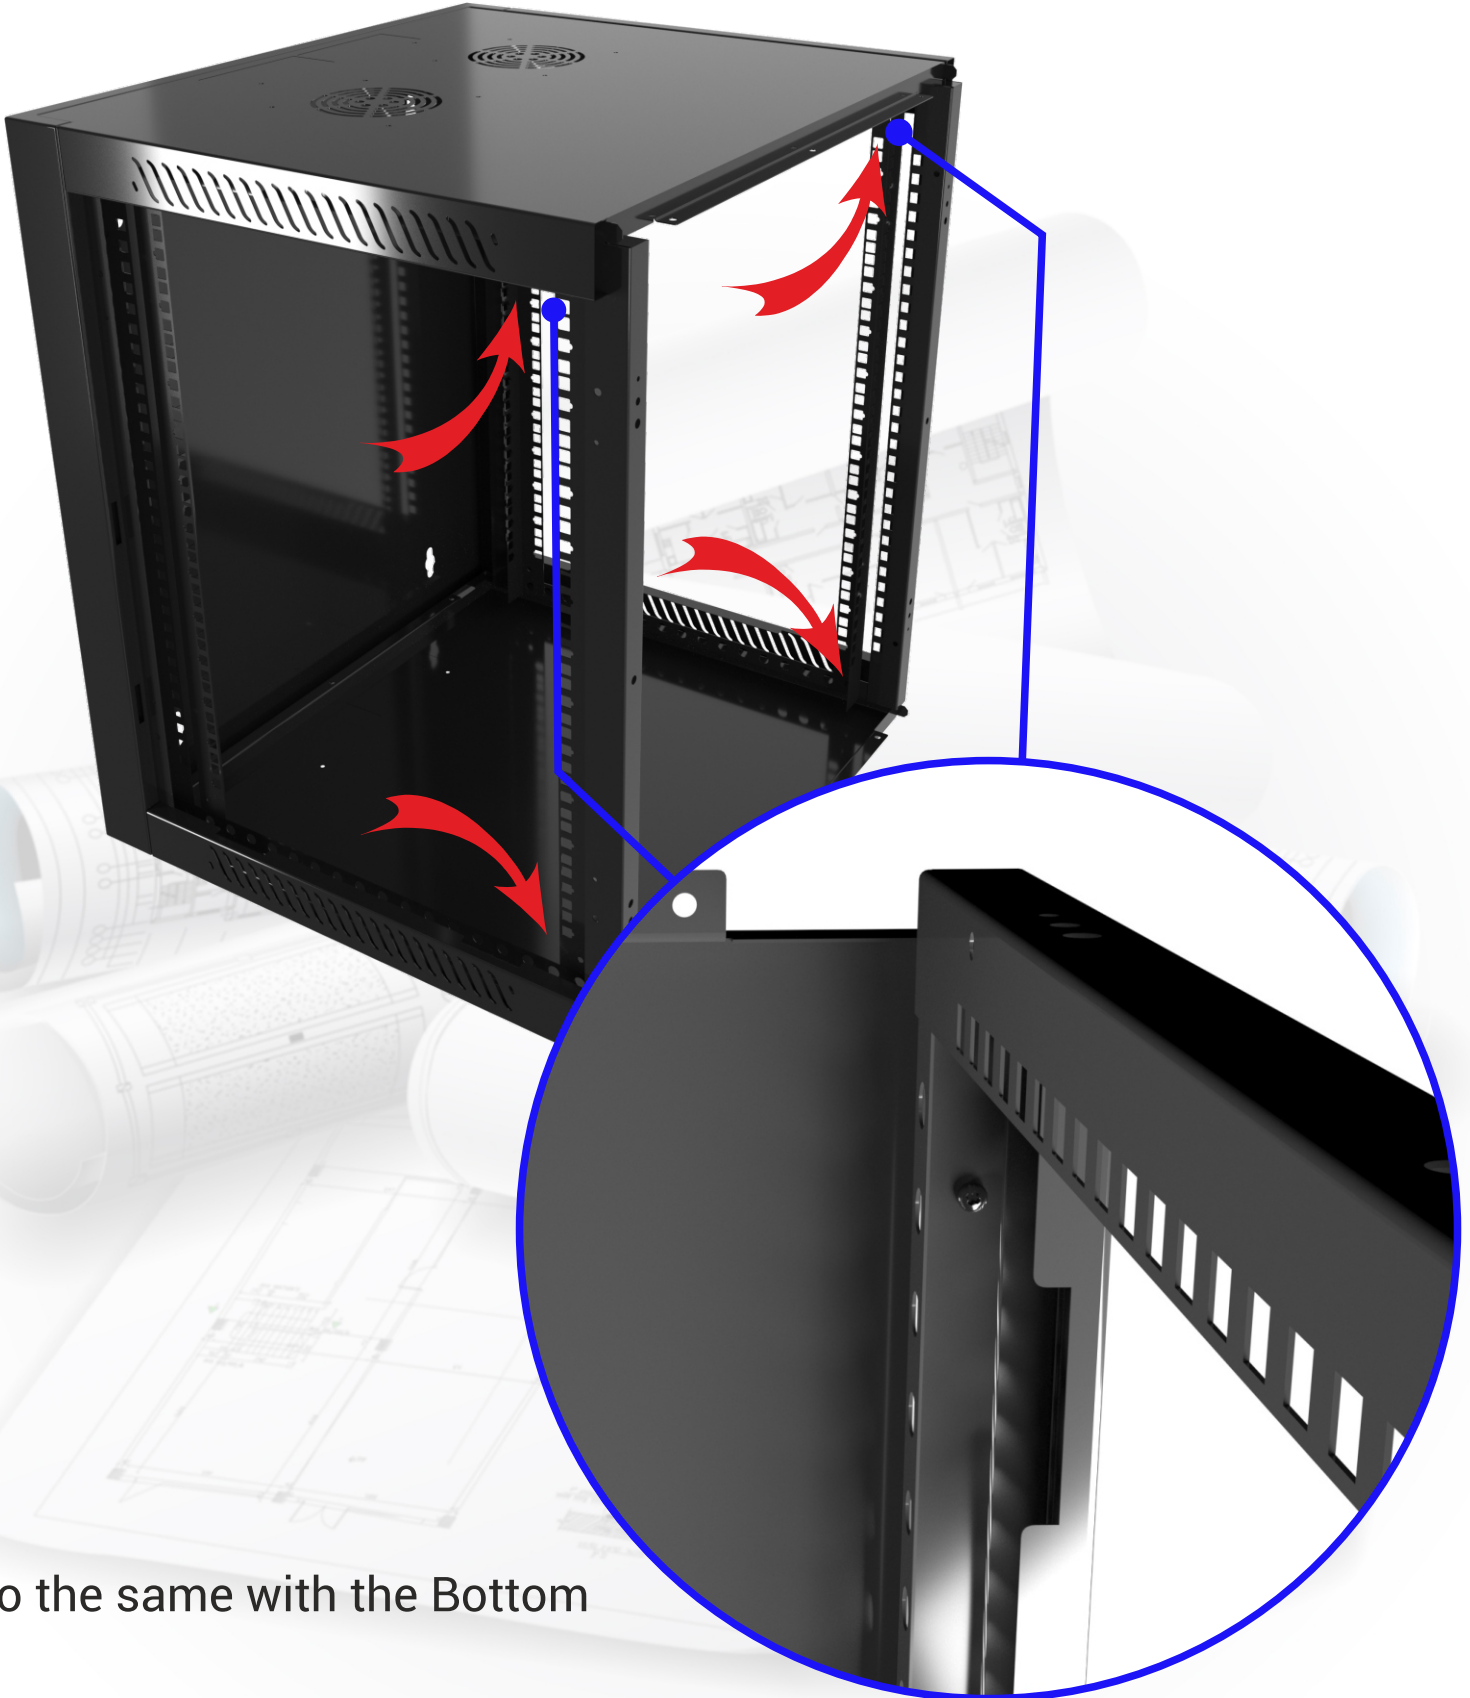

Do the same with the Bottom

STEP#6

Fix the Front Door frame with the Side Frames using the hexagonal **M6** Screws. Secure the construction with the Black **M5** screws.



STEP#7




Install the side panels.



STEP#8

Install the Front Door



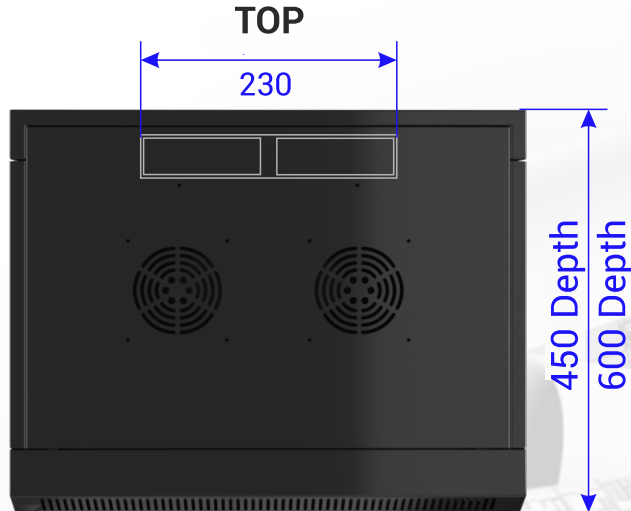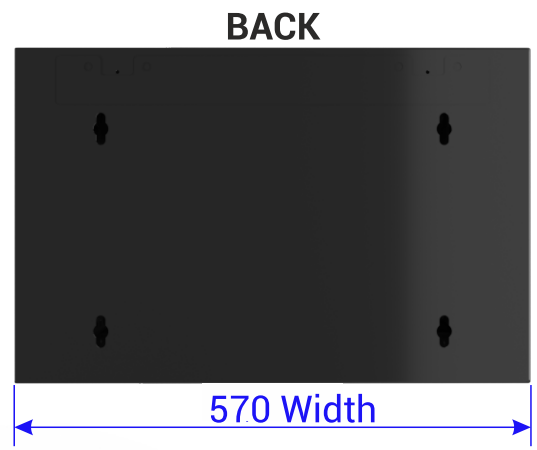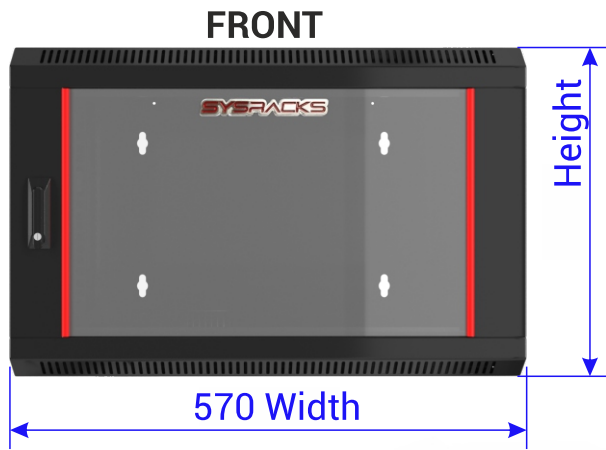

Model №	Capacity	Height
SRE4506	6 (U)	370 (mm)
SRE4509	9 (U)	500 (mm)
SRE4512	12 (U)	635 (mm)
SRE4515	15 (U)	770 (mm)

Model №	Capacity	Height
SRE5606	6 (U)	370 (mm)
SRE5609	9 (U)	500 (mm)
SRE5612	12 (U)	635 (mm)
SRE5615	15 (U)	770 (mm)

Loading Capacity: 130 Lbs.

Features:

- Fully Locking Front door and side panels
- Adjustable vertical U-Mark mounting rails
- Glass door with the lockable Latch Handle
- Rear panel plank and Mounting holes to facilitate Wall installation
- 19"- Standard Equipment Industry compliance